

# **Product datasheet**

# Captair Bio 320

Mobile ductless PCR workstation

## **Complete protection for RNA/DNA amplification**

A high energy UV light is used to decontaminate the worktop from biological cross-contamination between operations.

## **UV decontamination**

- Protect your samples from cross-contamination
- Powerful UV decontamination (254 nm lamp power)
- Adjustable timer
- Automatic UV lamp off switch in case the sash is opened when the UV light is on

## Easy to clean

- Work surface is easy to clean
- Seamless worktop with smooth corners (available in TRESPA®TopLab<sup>PLUS</sup> or Stainless steel (304L)
- Low porosity material


## **Ergonomic design**


- Slanted sash provides an ergonomic position for comfort and productivity
- Compact tubular fluorescent lighting
- Side panel utility ports for allow electrical cables and/or fluid lines to enter the enclosure with ease










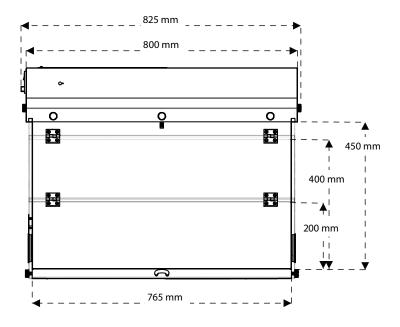

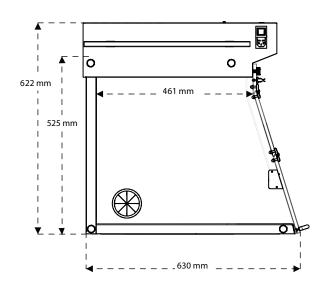


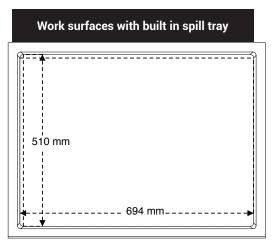



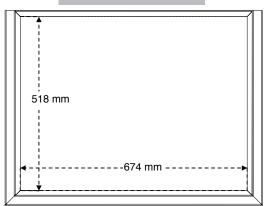

Benchcap: fixed work bench

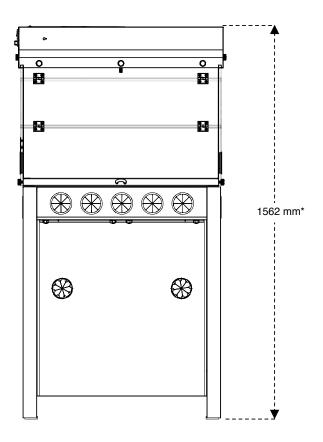

\* For Mobicap: rolling cart, deduct 27 mm



| Safety standards               | NF EN 61010 - CE Marking   |
|--------------------------------|--|
| External width (mm-in)         | 825 / 32.4   |
| External depth (mm-in)         | 630 / 24.8   |
| External height (mm-in)        | 647 / 25.5   |
| Internal width (mm-in)         | 765 / 30.1   |
| Internal depth min-max (mm-in) | 461-585 / 18.1 - 23  |
| Internal height (mm-in)        | 400 / 15.7   |
| Voltage / Frequency (V-Hz)     | 220-240 / 50-60 or 100-110 / 60  |
| Power consumption (W)          | 25   |
| Decibel level (dBA)            | < 40   |
| Side and front panels          | 10 mm thick synthetic glass is designed to protect users from harmful UV rays and β (Bêta)<br>emitted from radioactive isotopes such as: T(3H), 14C, 32P |
| Structure                      | Corrosion resistant electro-galvanized steel coated with anti-acid polymer   |
| Filtration module              | Polypropylene  |

### Features

| Worktop                  | Stainless steel 304 L / TRESPA® TopLab PLUS  |
|--------------------------|--|
| Bactericidal UV Lights   | 15 W - Wavelength : 254 nm   |
|                          | 0.08 mJ/ s/cm <sup>2</sup>   |
| Internal lighting        | Compact fluorescent lighting - 18 Watts - IP 67  |
|                          | 500 Lux  |
| Side panel utility ports | For allow electrical cables and/or fluid lines to enter the enclosure with ease - 2 per unit |

### Accessories

| Benches | Rolling cart (Mobicap) or fixed bench (Benchcap) |
|---------|--|
| Shelves | Internal metal sliding shelf (only for Benchcap) |



Erlab's state of the art Research & Development Laboratory relies exclusively on filtration



#### We provide safety, we protect your health

Erlab invented the ductless fume hood in 1968. With more than 50 years of experience in the field of chemical filtration and protection of laboratory personnel; we know the formula for safety. With Erlab, you will never have to wonder or worry if our products are safe. We build each one of the following 7 ingredients into our products, and without all of them, your health and safety will be compromised.

#### Erlab R&D Laboratory

The engineers and chemists in our state-of-the-art R&D laboratory understand molecular filtration. We are committed to designing products that are safe and of the highest quality, strive to improve our products, and continuously develop new products that provide greater protection in the laboratory.

#### 2 Strict Safety Standards

We hold ourselves to the highest standard and adhere to the strict AFNOR NF X 15-211: 2009 filtration safety standard as endorsed by ANSI Z9.5-2012.

#### 3 A Published Chemical Listing

It all begins here. Without this listing, we are not compliant with AFNOR NFX 15-211. Our in-house laboratory tests, as well as independent testing, to verify the retention capacity of over 700 chemicals for our filters.

#### Independent Testing

Erlab filters have been independently tested multiple times at various concentrations guaranteeing that our safety solutions all adhere to the strict performance criteria of the AFNOR NF X 15-211:2009 standard assuring that the emission concentration at the filter exhaust will always be lower than 1% of the TLV.

#### 5 Application Questionnaire (Valiquest)

Our laboratory specialists will recommend the appropriate filtration fume hood, type of filter, and personalized advice.

#### 6 Certificate of Validation for the chemicals used in the hood

A certified PhD chemist issues a Certificate of Validation with a list of the chemicals approved for use in the hood.

#### **7** Our Safety Program

We back up our products 100%. This program includes your specialized chemical evaluation, validation of your hood upon installation, and a filtration safety specialist at your service to ensure that your hood is operating to its full potential.

France +33 (0) 2 32 09 55 80 | ventes@erlab.net

Germany 0800 330 47 31 | export.north@erlab.net United States +1 800-964-4434 | captairsales@erlab.com United Kingdom +44 (0) 1722 341 940 | export.north@erlab.net China +86 (0) 512 5781 4085 | sales.china@erlab.com.cn Italy +39 (0) 2 89 00 771 | export.south@erlab.net Spain +34 936 732 474 | export.south@erlab.net

www.erlab.com

This document is not contractual. Ertab reserves the right to modify the present document without prior notice. Bio\_Smart.320\_2021\_02\_EN